

SIVGE Z20 SERIES

Mobile Elevating Work Platforms



Product conform with below standards:

- 2006/42/EC Machinery Directive
- EN 280-2013+A1-2015
- EN ISO 12100: 2010
- EN 60204-1:2006+A1:2009+AC:2010
- EN ISO 13849-1:2015
- GB25949-2010
- JB/T12216-2015






HANGZHOU SIVGE MACHINERY CO.,LTD
ADD: NO 15 KANGXIAN ROAD, GONGSHU DISTRICT,
HANGZHOU, ZHEJIANG, CHINA
POST CODE: 310015 TEL: +86 571 88043728 88043711
FAX: +86 571 88043715 E-mail: info@sivge.com

© www.sivge.com
© www.aerial-workplatform.com
sivge stock(833084)

Z20 Series Self-propelled Dual Mast

STANDARD FEATURES:

- Drivable at full height
- One-hand proportional joystick
- Suitable for two persons to work upraised
- Dual controls operation (platform and ground)
- Emergency stop buttons at both controls
- Emergency lowering system
- Battery charge indicator
- Tilt audible alarm
- Forklift pocket
- Smooth, solid and non-marking tires
- Maintenance-free battery
- Two drive speed
- Loss of power brake

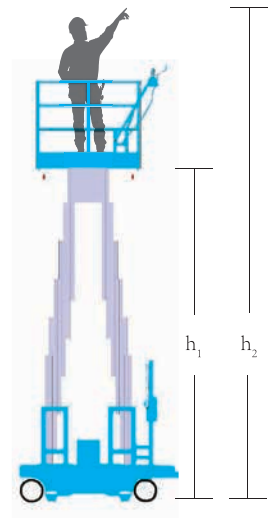

	Z2006	Z2008
Model-code	GTWZ6-2006	GTWZ8-2008
Platform height(m)(h ₁)	6	8
Working height(m)(h ₂)	8	10
Capacity(kg)/occupants	300/2	300/2
Platform size(mm)	1380*700	1380*700
Stowed length(mm)(l ₀)	1800	1800
Stowed width(mm)(w ₀)	970	970
Stowed height(mm)(h ₀)	1960	1960
Machine weight(kg)	1300	1400
Turning Radius Outside/ inside	2.1m/0m	2.1m/0m
Wheelbase	1492mm	1492mm
Ground Clearance	(Stowed): 88mm (Raised): 12mm	(Stowed): 88mm (Raised): 12mm
Rear wheel	Steering wheel 12inch	Steering wheel 12inch
Front wheel	Driving wheel 12inch	Driving wheel 12inch
Travel speed(Stowed) (km/h)	2.4	2.4
Travel speed (Lift) (km/h)	0.8	0.8
Climb ability	15%	15%
Power supply	DC24V	DC24V
Power input(kw)	1.2	1.2
Battery	12V/150Ah*2	12V/150Ah*2
Max. allowed wind speed	12.5m/s	12.5m/s
Rated oil pressure	12Mpa	12Mpa



※ Optional: design service is available if the standard models cannot fulfill the needs.
 □ Product specifications are subject to change without notice or obligation.